


WARM ROOF – GLUED SYSTEM, CLASSICAL STRUCTURE, WITH MOISTURE STOP,
 TRAPEZOIDAL PLATE SUPPORTING STRUCTURE, PLASTIC FOIL WATERPROOFING

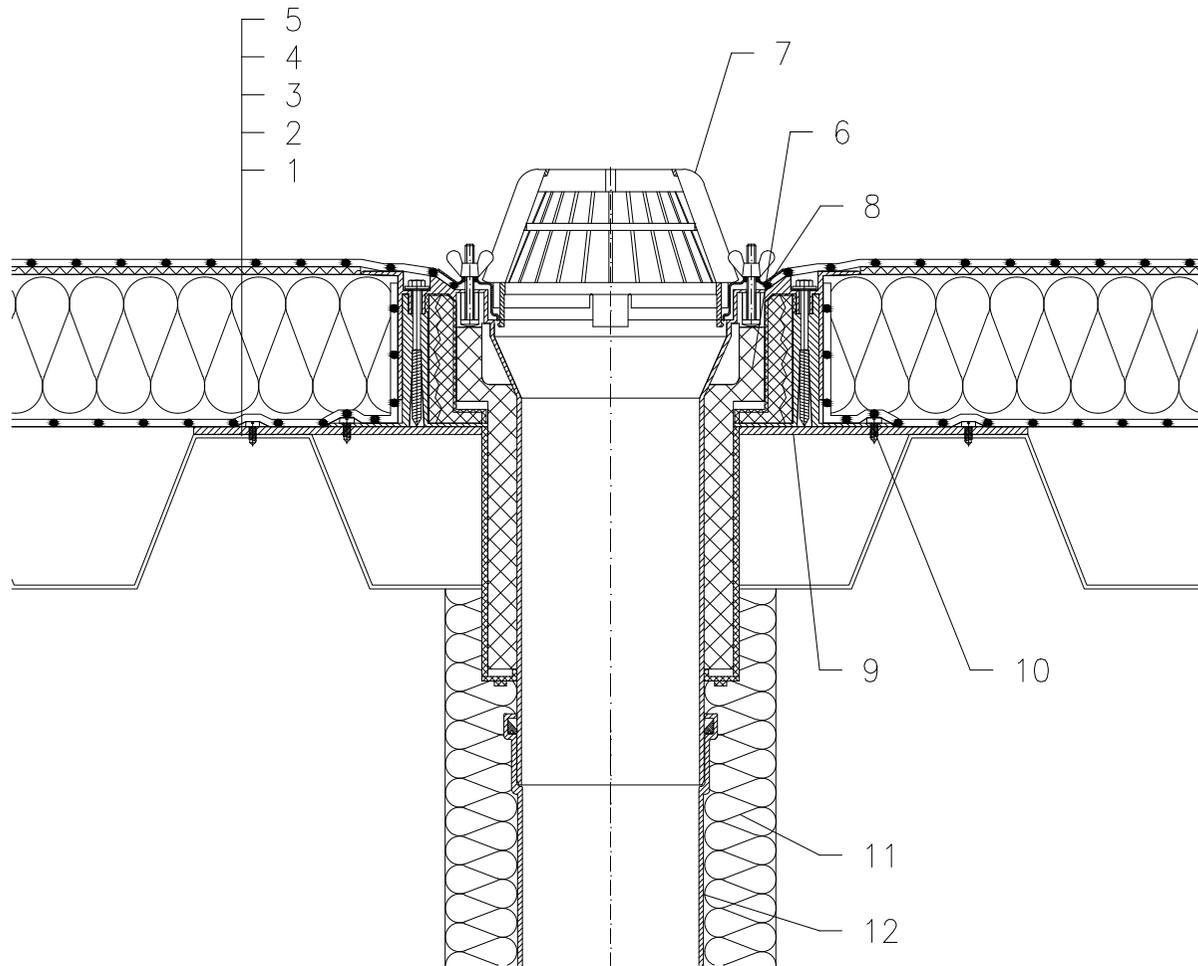

- 1 TRAPEZOIDAL PLATE
- 2 MOISTURE STOP (GLUED INTO DRAIN OUTER-HOUSING)
- 3 THERMAL INSULATION
- 4 DILATATION LAYER
- 5 PLASTIC FOIL WATERPROOFING NON-SOLID GLUED
- 6 FLAT-ROOF DRAIN HL63 DRAINBOX, WITH INSULATED DRAIN BODY, TELESCOPED OUTER-HOUSING FOR PRECISE ADJUSTMENTS TO INSULATIONS 100-160 mm, FLANGE AND STAINLESS STEEL CLAMPING RING (FOR PVC SHEETINGS FLAT -ROOF DRAIN HL63P)
- 7 DOMED PLASTIC GRATE $\varnothing 180$ mm (INCL. WITH HL63)
- 8 SEALING PACKING (SEE DETAIL-ACCESSORIES)
- 9 MOUNTING METAL PLATE
- 10 ANCHOR BOLT
- 11 DOWNPIPE THERMAL INSULATION
- 12 DOWNPIPE

NOTE:

FLAT-ROOF DRAIN HL63.1 (FOR PVC SHEETINGS FLAT -ROOF DRAIN HL63.1P)

HEATED (230V, 10-30 WATTS) CAN BE USED.

ASSEMBLY INLET: $\varnothing 255$ mm, OR 255x400 mm